

PASNETTEN

Breedte	32 cm > 300 cm	
Lengte	52 cm > 800 cm	
Diameter	Ø6 - B500B	
	Ø8 - B500B	
	Ø10 - B500B	
	Ø12 - B500B	
	Ø16 - B500B	
Sparing	√ Verloop	√
Reductie	√ Combinatie diameters	√
Reveel	√ Maaswijdte variabel	√

B-NETTEN

Type	Ø mm	Afmetingen L x B (mm)	Mazen (mm)	Gewicht Kg/stuk	Stuks/ pak	Gewicht/ Pak	m ²
B188A	6	5950 x 2350	150 - 150	38,32	40	1532	11,97
B283A	6	6000 x 2400	100 - 100	58,34	20	1167	11,97
B385A	7	6000 x 2400	100 - 100	79,40	20	1588	11,97
B335A	8	5950 x 2350	150 - 150	64,90	20	1298	10,82
B503A	8	6000 x 2400	100 - 100	100,49	10	1005	11,20
B424A	9	5950 x 2350	150 - 150	81,99	20	1640	10,82
B636A	9	6000 x 2400	100 - 100	126,95	10	1269	11,20
B524A	10	5950 x 2350	150 - 150	101,37	10	1014	10,82
B785A	10	6000 x 2400	100 - 100	156,96	10	1570	11,20
B754A	12	5950 x 2350	150 - 150	138,53	10	1385	9,72
B1131A	12	6000 x 2400	100 - 100	210,99	5	1055	9,72

BSA-NETTEN

Type	Ø mm	Afmetingen L x B (mm)	Mazen (mm)	Gewicht Kg/stuk	Stuks/ pak	Gewicht/ Pak	m ²
BSA188A	6	3000 x 1950	150 - 150	15,40	25	385	4,45
BSA283A	6	3000 x 2000	100 - 100	23,73	25	593	4,59
BSA385A	7	4000 x 2000	100 - 100	41,89	25	1047	5,76
BSA335A	8	2950 x 1900	150 - 150	24,85	25	621	3,82
BSA402A	8	3000 x 2000	125 - 125	32,56	25	814	4,16
BSA503A	8	3000 x 2000	100 - 100	40,20	25	1005	4,16
BSA524A	10	2950 x 1900	150 - 150	38,81	25	970	3,43

P-NETTEN

Type	Ø mm	Afmetingen L x B (mm)	Mazen (mm)	Gewicht Kg/stuk	Stuks/ pak	Gewicht/ Pak	m ²
P130A	5	5000 x 2000	150 - 150	20,17	50	1009	8,30
P188A	6	5000 x 2000	150 - 150	29,08	50	1454	8,00
P335A	8	5000 x 2000	150 - 150	51,75	30	1553	7,35
P524A	10	5000 x 2000	150 - 150	80,83	20	1617	6,75
P754A	12	5000 x 2000	150 - 150	116,33	10	1163	6,15

BEC-NETTEN

Type	Ø mm	Afmetingen L x B (mm)	Mazen (mm)	Gewicht Kg/stuk	Stuks/ pak	Gewicht/ Pak	m ²
BEC188A	6	5950 x 2350	150 - 150	36,48	40	1459	10,82
BEC257A	7	5950 x 2350	150 - 150	49,77	30	1493	10,82
BEC335A	8	4450 x 2350	150 - 150	45,23	30	1357	7,02
BEC503A	8	3500 x 2200	100 - 100	49,57	30	1487	5,10
BEC424A	9	6000 x 2400	150 - 150	79,04	20	1581	9,72
BEC524A	10	5900 x 2300	150 - 150	89,71	15	1346	8,66
BEC785A	10	6000 x 2400	100 - 100	141,42	10	1414	9,01

PS-NETTEN

Type	Ø mm	Afmetingen L x B (mm)	Mazen (mm)	Gewicht Kg/stuk	Stuks/ pak	Gewicht/ Pak	m ²
PS84A	4	3000 x 2000	150 - 150	8,12	50	406	5,0
PS252A	4	3000 x 2000	50 - 50	23,66	25	592	5,0
PS98A	5	3000 x 2000	200 - 200	9,24	50	462	4,8
PS130A	5	3000 x 2000	150 - 150	12,63	50	632	4,8
PS196A	5	3000 x 2000	100 - 100	18,48	50	924	4,8
PS262A	5	3000 x 2000	75 - 75	24,80	50	1240	4,8
PS188A	6	3000 x 2000	150 - 150	18,20	50	910	4,6
PS283A	6	3000 x 2000	100 - 100	26,64	50	1332	4,6
PS335A	8	3000 x 2000	150 - 150	32,39	40	1296	4,1
PS503A	8	3000 x 2000	100 - 100	47,40	30	1422	4,1
PS524A	10	3000 x 2000	150 - 150	50,59	30	1518	3,7

STAAFNETTEN

Type	Ø mm	Afmetingen L x B (mm)	Mazen (mm)	Gewicht Kg/stuk	Stuks/ pak	Gewicht/ Pak	m ² 50xØ	Euro- code 2 Goede aanh.	Euro- code 2 Slechte aanh.
SN503AU	8	6000 x 1150	100	31,72	25	793	3,36	3,31	3,18
SN424AU	9	6000 x 1100	150	27,09	25	677	3,33	3,26	3,11
SN636AU	9	6000 x 1150	100	39,43	25	985	3,33	3,26	3,11
SN524AU	10	6000 x 1100	150	32,80	25	820	3,30	3,20	3,04
SN785AU	10	6000 x 1150	100	47,90	25	1197	3,30	3,20	3,04
SN754AU	12	6000 x 1100	150	46,09	25	1152	3,24	3,11	2,90
SN1131AU	12	6000 x 750	100	45,25	25	1131	2,16	2,08	1,94


V-NETTEN

Type	Afmetingen mm	Hoofdwapening mm	Verdeelwapening mm	Netgewicht kg	Stuks/ pak
V 50	2500 x 450	5 - 225	5 - 250	1,46	100
V 154	2250 x 1000	5 - 100	7 - 250	3,41	100
V 189	2500 x 1300	5 - 100	6 - 150	5,68	100
V 254	2250 x 1000	6 - 100	9 - 250	5,49	100
V 257	2500 x 1500	5 - 100	7 - 150	8,47	100

KORVEN

Afmetingen	Hoofdwapeing	Beugels	Flank	Lengte	Type
30 x 40 cm	3x Ø8 O/B	BGL Ø8-300	nvt	3/6 m ³	O B G
	3x Ø10 O/B	BGL Ø8-300	nvt	3/6 m ³	O B G
	3x Ø12 O/B	BGL Ø8-300	nvt	3/6 m ³	O B G
35 x 40 cm	3x Ø8 O/B	BGL Ø8-300	nvt	3/6 m ³	O B G
	3x Ø10 O/B	BGL Ø8-300	nvt	3/6 m ³	O B G
	3x Ø12 O/B	BGL Ø8-300	nvt	3/6 m ³	O B G
30 x 50 cm	3x Ø8 O/B	BGL Ø8-300	1x Ø8	3/6 m ³	O B G
	3x Ø10 O/B	BGL Ø8-300	1x Ø8	3/6 m ³	O B G
	3x Ø12 O/B	BGL Ø8-300	1x Ø8	3/6 m ³	O B G
	3x Ø16 O/B	BGL Ø8-300	1x Ø8	3/6 m ³	O B G
35 x 50 cm	3x Ø8 O/B	BGL Ø8-300	1x Ø8	3/6 m ³	O B G
	3x Ø10 O/B	BGL Ø8-300	1x Ø8	3/6 m ³	O B G
	3x Ø12 O/B	BGL Ø8-300	1x Ø8	3/6 m ³	O B G
	3x Ø16 O/B	BGL Ø8-300	1x Ø8	3/6 m ³	O B G
40 x 50 cm	4x Ø12 O/B	BGL Ø8-300	1x Ø8	3/6 m ³	O B G

SUPPORTLIGGERS

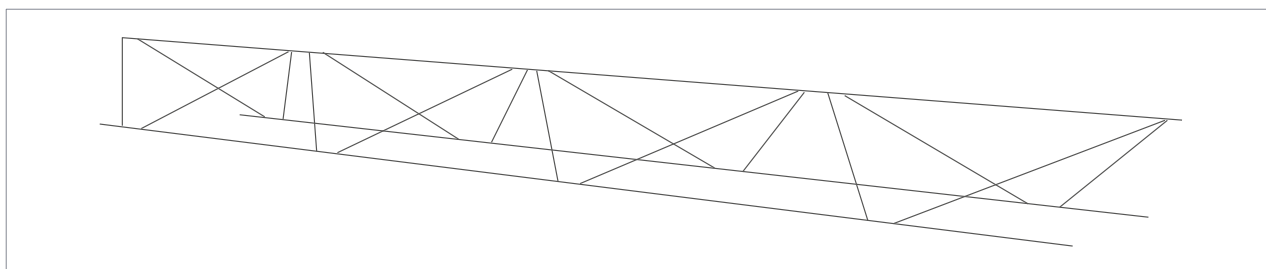

Lengte	Hoogte	Verbruik	Type
--------	--------	----------	------

2 m	50-400 mm	0,8 p/m ²	B-netten
-----	-----------	----------------------	----------

2 m	50-400 mm	0,9 p/m ²	BEC-netten
-----	-----------	----------------------	------------

Slingerliggers 50 tot 150, 160, 180 en 200 mm standaard op voorraad.

STAVEN (B500B EN B500A)

Diameter	Kwaliteit	Lengte
8 mm	B500B	6/12 mtr
10 mm	B500B	6/12 mtr
12 mm	B500B	6/12 mtr
16 mm	B500B	6/12 mtr
20 mm	B500B	6/12 mtr
25 mm	B500B	6/12 mtr
32 mm	B500B	6/12 mtr
40 mm	B500B	6/12 mtr